

Datasheet

HGM500 Googol Diesel Power Generator


**360kW- 450kVA
400kW- 500kVA
50Hz**

Googol diesel generators are powered by Googol engines which are being manufactured by latest US based technology. Googol engines are known for cost effective reliable power solution.

Features

Googol power generators are designed to operate under extreme conditions with low operational and maintenance cost.

Honny power manufacture and test it's products under strict QC rules to insure international manufacturing standard.

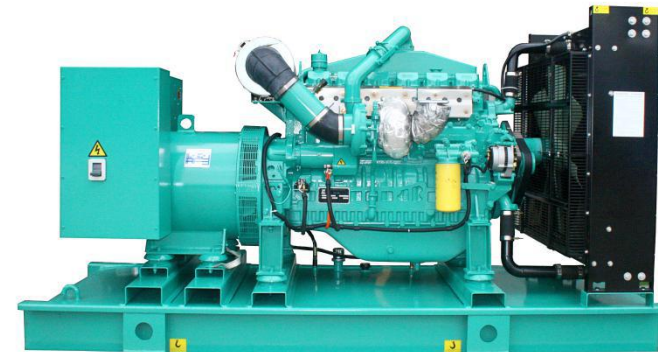

Equipment

Engine and alternator mounted on same frame steel skid.
Build in damper for anti-vibration.
Compact design, easy to operate and maintain.
Sino-US Googol brand engine
Top brand AC alternator
Full range protections, alarms with auto shutdown features.
Comply with ISO8628 national standard and ISO9001 quality standard. Specially designed horizontal/vertical, engine driven/electrical radiator. Industrial, Residential silencers
Catalytic converters
Heat exchangers
Special spark arrester silencers
Standard set for "CE" certification
Sound & Weatherproof canopy optional
Spring, seismic anti-vibration mounts
Advanced facility for FAT.

Diesel Generator Specification

Genset Model		HGM500
Genset Prime Output	kW/kVA	360/450
Genset Standby Output	kW/kVA	400/500
Rating Power Factor		0.8
Rating Speed	rpm	1500
Rating Frequency	Hz	50
Rating Voltage	V	400
Engine Model		PTAA780G3
Displacement	l	12.8
Configuration		6 in line
Genset Size-Open Type (LxWxH)	mm	3300x1150x1600
Genset Weight	kg	2900

Engine Data in General

Aspiration Type		Turbocharger, air-air aftercooler
Injection Type		Direct Injection
Configuration		In line
No. Of Cylinders		6
Displacement	l	12.8
Bore	mm	128
Stroke	mm	166
Compression Ratio		15.5:1
Piston Speed	m/s	8.3
Rotation Direction (from Flywheel)		Counter Clockwise
Number of Flywheel Teeth		160
Flywheel House Size		SAE1-14

Engine Specification

Engine Model		PTAA780G3
Speed	rpm	1500
Engine Standby Output (LTP)	kW	450
Engine Prime Output (PRP)	kW	408
Engine Continuous Power (COP)	kW	320
Fan Reduction	kW	14
Engine Net Standby Output (LTP)	kW	436
Engine Net Prime Output (PRP)	kW	394
Engine Net Continuous Output (COP)	kW	306
BMEP for Standby Output	bar	27.52
BMEP for Prime Output	bar	24.88
BMEP for Continuous Output	bar	19.6
Typical Generation Standby Output	kW	400
Typical Generation Prime Output	kW	360
Typical Generation Continuous Output	kW	280
Typical Alternator Efficiency		94.1%
Power Factor		0.8
Speed Droop (Static) Elect. Gov.		0-5%
Governing Standards to ISO 8528		G3
Max. Step Load Acceptance, 1st Step		55%

Lubrication System

Lube Oil Specification		AFI-CG4
Oil Capacity	l	40
Max. Permissible Oil Temperature	°C	110
Oil Pressure Warning	kPa	200
Oil Pressure Shutdown	kPa	160
Oil Consumption (as % of Fuel Consumption)	%	≤0.5

Electrical System

Charging Alternator Voltage	V	28
Charging Alternator Capacity	A	55
Starting Voltage	V	24
Starting Motor Capacity	kW	1*6.6
Minimum Battery Capacity (Ref. Varta Brand)	Ah	2*150

Fuel System

Governor Type		Electrical
Fuel Consumption at 25% of PRP	l/h	31
Fuel Consumption at 50% of PRP	l/h	52
Fuel Consumption at 75% of PRP	l/h	74
Fuel Consumption at 100% of PRP	l/h	98
Lowest Fuel Consumption Ratio	g/kW.hr	201

Intake & Exhaust System

Combustion Air Consumption	m ³ /min	33.8
Max. Intake Restriction	KPa	5
Exhaust Temperature (Before Turbo)	°C	685
Exhaust Temperature (After Turbo)	°C	540
Max. Exhaust Back Pressure	Kpa	5
Exhaust Gas Flow	m ³ /min	41
Turbo Bellows Diameter	mm	DN100-150
Exhaust Flange Diameter	mm	DN150

Cooling System

Coolant Capacity for Engine	l	18
Max. Permissible Temperature	°C	90
Max. Coolant Warning Temperature	°C	95
Max. Coolant Shutdown Temperature	°C	105
Thermostat Open Temperature	°C	79
Radiator Cooling Flow	m ³ /min	410
Flow of Coolant Pump	m ³ /h	19.7
Heat Dissipation (Engine Radiator)	kW	219
Heat Dissipation (Convection)	kW	33

Alternator Specification

Generator Model		GP450-4P
Voltage of Genset	V	400
Rating Speed	rpm	1500
Frequency	Hz	50
Capacity @ 0.8PF, H Rise Class	%	360
Efficiency @ 0.8PF		94.1
Duty		S1
Bearing		Single
Insulation		H
Rise Temperature		H
Enclosure		IP23
Over speed	rpm	2250
Excitation System		AVR
AVR Model		SX440
Poles		4

Performance Parameter

Frequency

Frequency Droop	%	≤5
Steady-state Frequency Band	%	≤0.5
Related Downward Range of Frequency Setting	%	≥2.5
Related Upward Range of Frequency Setting	%	≥+2.5
Change Rate of Frequency Setting	%	0.2 ~ 1

Transient Frequency Deviation

100% Sudden Power Decrease	%	≤10
Sudden Power Increase	%	≤7
100% Sudden Power Decrease	%	≤+10
Sudden Power Increase	%	≤-7
Frequency Recovery Time	sec	≤3
Related Frequency Tolerance Band	%	2

Voltage

Steady-state Voltage Deviation	%	≤±1
Voltage Unbalance	%	1
Range of Voltage Setting	%	±5
Change Rate of Voltage Setting	%	0.2 ~1

Transient Voltage Deviation

100% Sudden Power Decrease	%	≤+20
Sudden Power Increase	%	≤-15
Voltage Recovery Time	s	≤2

Voltage Waveform & EMC

Sin. Distortion	%	4
Coefficient Variation	%	5
Individual Harmonic Content	%	2
Radio Interference THF	%	≤2

Guangdong Honny Power-tech Co., Ltd.
 Tel: 0086-769-2278 0359
 Fax: 0086-769-2278 0357
 Email: sales@honnypower.com
 Website: www.honnypower.com
 Address: No.2, Industry North Road, Songshan Lake, Dongguan, China

